

ALBERO

i Full equipment configuration you will find on pages 112 and 113.


CUSTOM SYSTEM | Convection fireplace inserts | **36 models**

4,5 kW


adjustable power range

32,5 kW

ALBERO line stands out by its light, modern form which integrates into every living space and usable floor space very well. It consists of six fireplace series differing in their heating power (9, 11, 14, 16, 19 and 25kW), the vision of fire (straight or corner) and the way of the door opening (lifted up „guillotine” type or traditionally opened to the side).

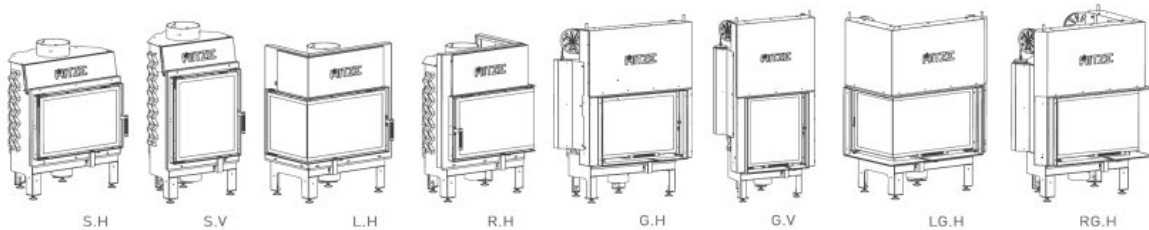

Fireplace inserts are equipped with an air inlet with a regulated throttle and special feet allowing for optimum leveling. The inside of the fireplace is lined with a special ceramic concrete insert. It accumulates warmth in the combustion chamber and is resistant to the temperature up to 1000°C. Air curtain reduces the deposition of soot on a ceramic glass pane and the after-burning system reduces the emission of harmful substances to the environment and improves fuel saving. A specially designed ventilated handle construction ensures the comfort of use, and steel door made of a profile of increased rigidity which guarantees tightness and strength.

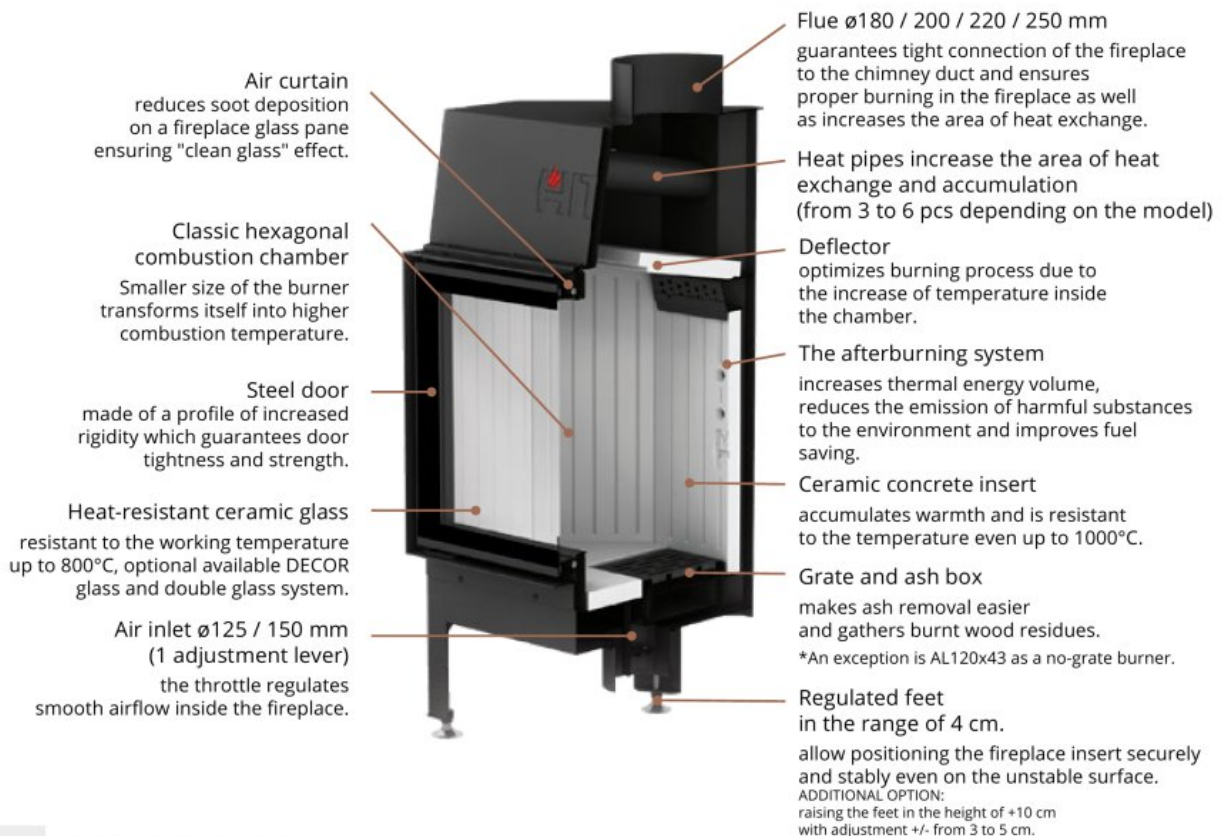



Encasing of **ALBERO AL14LG.H** insert using corner ventilation grid **SLIM SLE 6x80x45L.B.**

All ALBERO line inserts can be ordered with a double glazing system and fireplace glass pane in the so-called decor version (decorative glass).

For each model from the ALBERO line, you can additionally order fireplace grates, a suitable masking frame and also a portal frame for standard models.



Scan the QR code and learn more about Albero line convectional fireplaces.



Albero

The name of the line comes from the Italian word "albero" meaning "tree". It is a symbol of the pro-ecological philosophy of the Hitze brand that combines modern technology with care for the natural environment.