
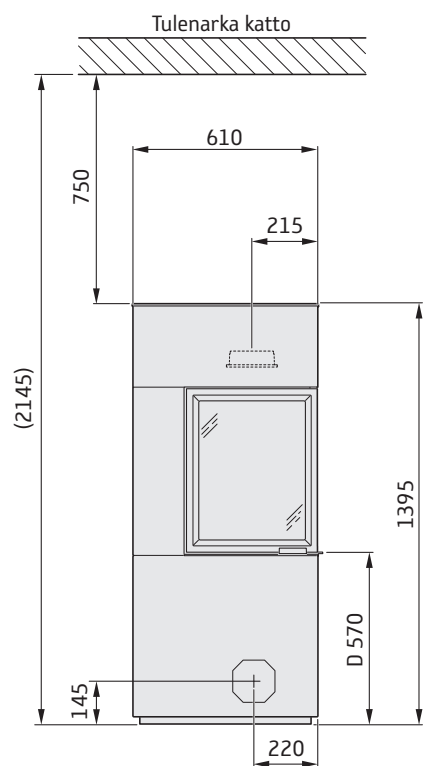


C420 / C420T

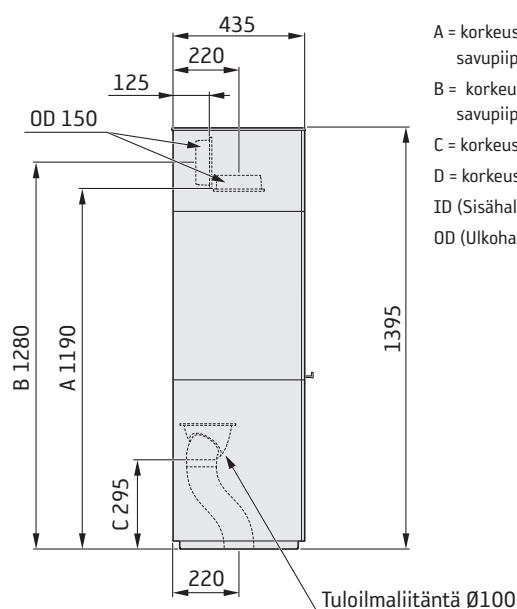

OD (Ulkohalkaisija)

The technical drawings show the Kalksi-1000 fire alarm control unit in two views:

- Side View (Top):** Shows the unit's profile against a fire-rated wall (Tulenarka seinä). The total height is 370 mm, with a mounting bracket height of 150 mm. The unit's width is 495 mm, and it is mounted 100 mm from the wall.
- Front View (Bottom):** Shows the unit's face. The mounting bracket is 250 mm wide. The unit is mounted 50 mm from the wall (50**). The distance from the bottom of the unit to the mounting surface is 320 mm. A note specifies the mounting surface: "50 mm Kalsiumsilikaatti $\lambda < 0.14 \text{ W/mK}$ ".

Technical drawing of the Palomuuuri fire door assembly. The drawing shows a side view of the door with a fire-rated core and a glass panel. The dimensions are as follows:

- Overall width: 445
- Overall height: 270
- Door thickness: 50**
- Frame thickness: 250
- Frame height: 50**

** Maalattujen seinien väriäytymisen välttämiseksi suosittelemme samoja suojaetäisyyksiä kuin tulenarkaan seinään.